


IMAGINE > CREATE POLYURETHANE

SPRAYTHANE 850

HIGH-SPEED PRODUCTION FINISHES

COLOUR
CLEAR
GLOSS
SATIN
MATT

WHAT 850 SPRAYTHANE WHITE SATIN FINISH
WHERE NISSAN STAND, 2003 SYDNEY MOTOR SHOW

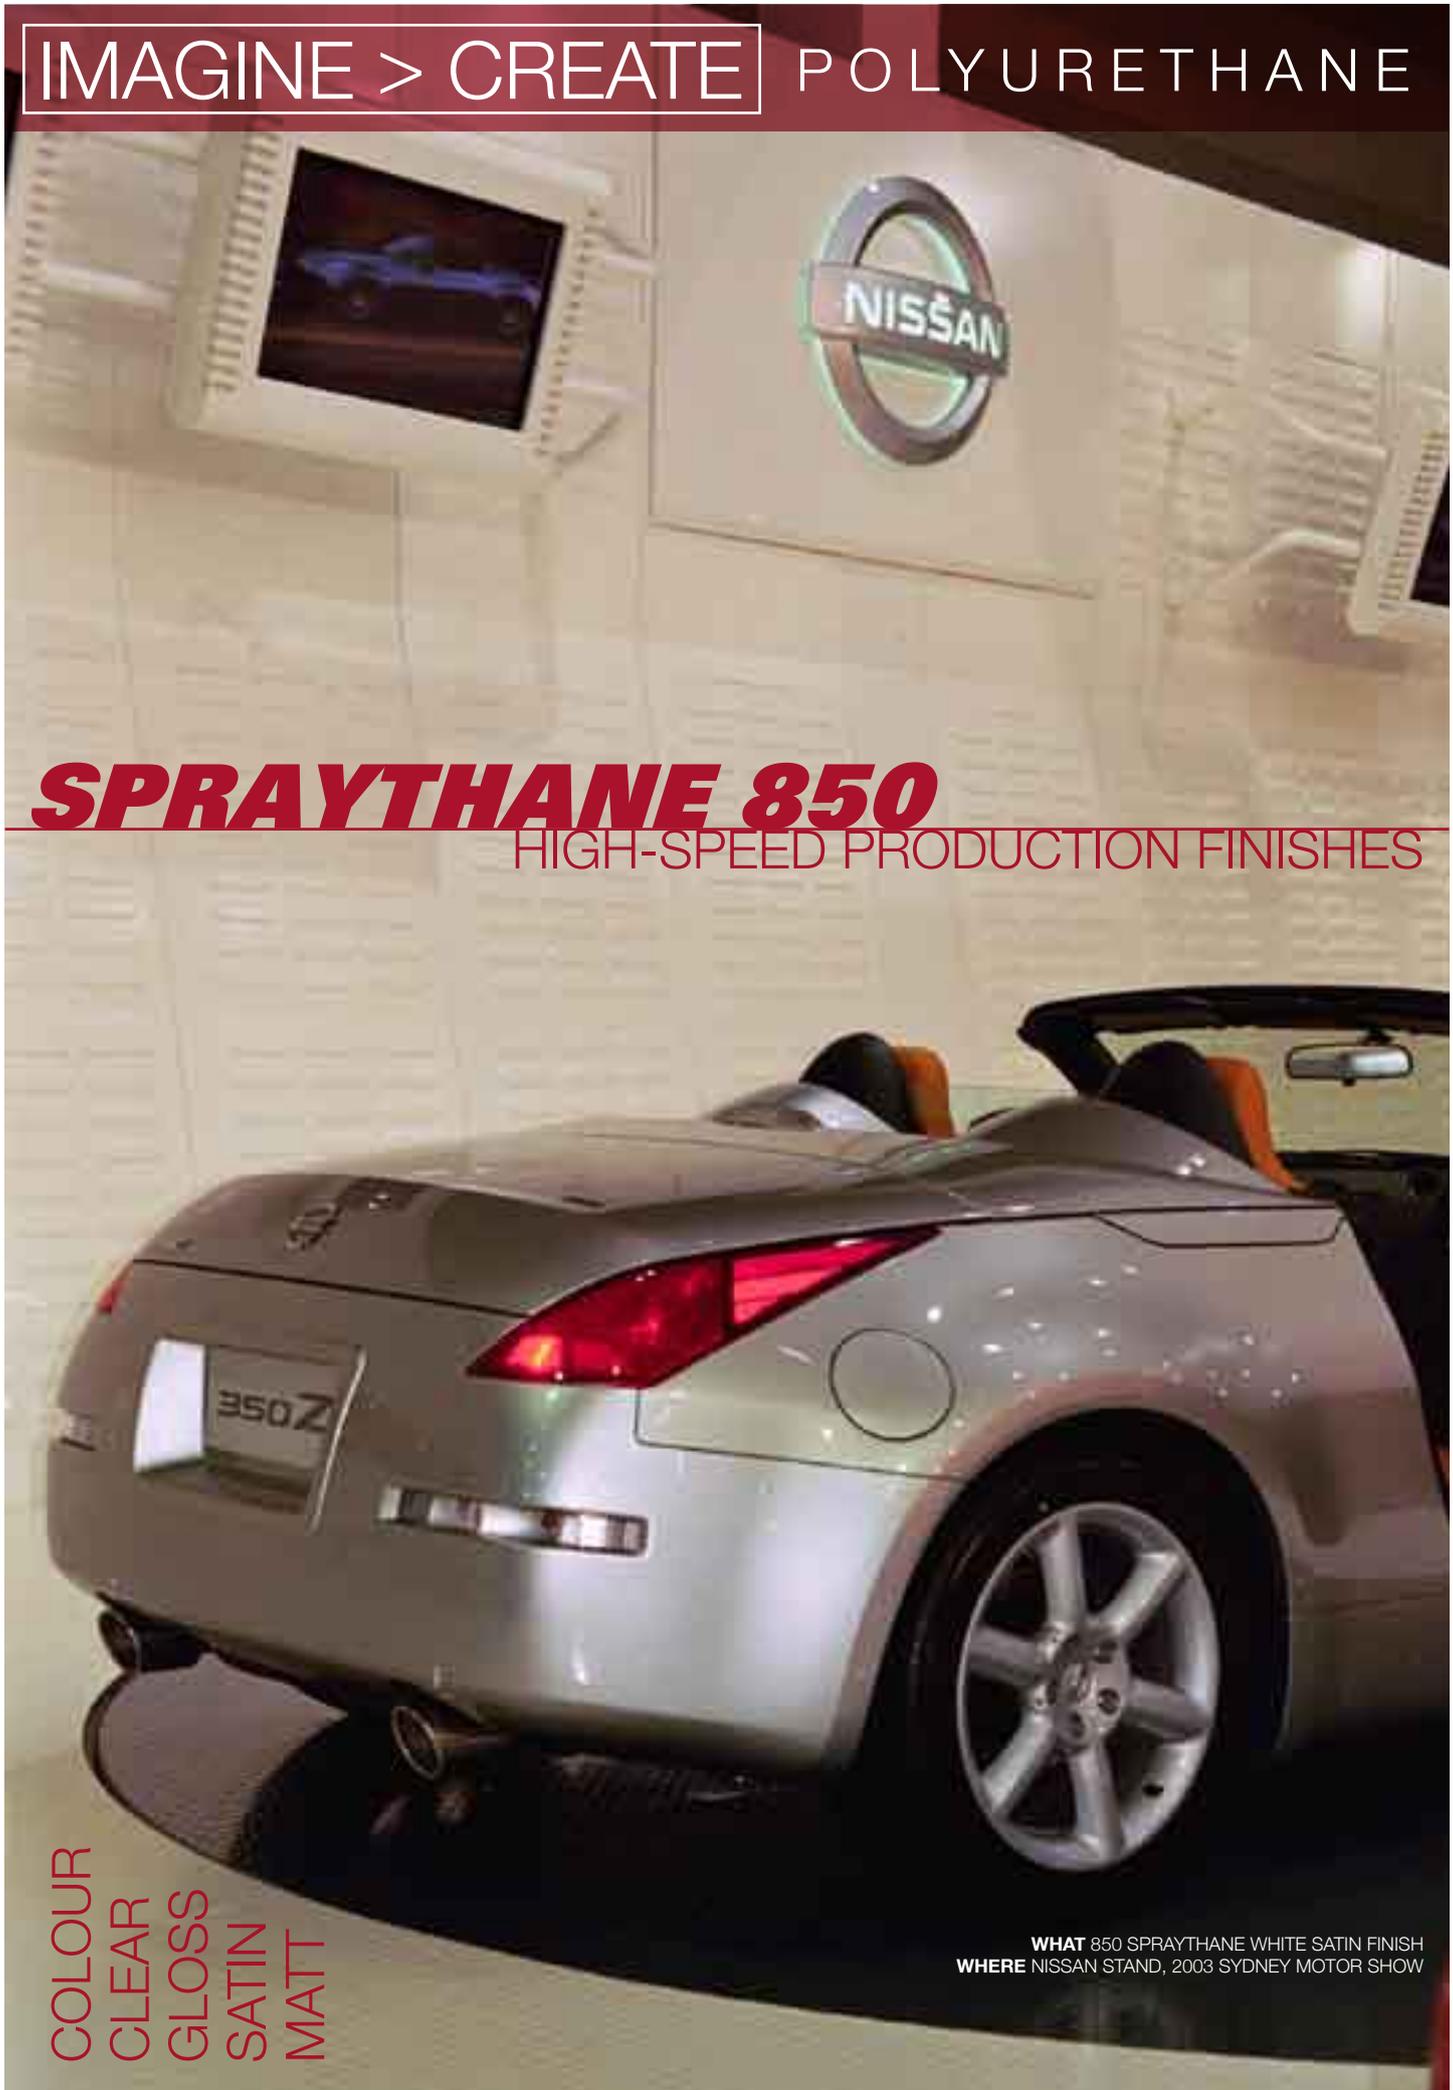

SPRAYTHANE™ 850

Satisfy Your
Need For Speed.



Spraythane™ 850 Ideal Uses:

- PROJECTS WHERE QUICK TURNAROUND IS KEY TO SUCCESS
- SHOPFITTING
- KITCHEN & BATHROOM CABINETRY
- CLEARS OVER TIMBER/ VENEER PANELLING

Australia's most popular polyurethane system for almost two decades!

The Spraythane™ range combines the fastest curing times available with a vast working temperature range, three gloss levels and textures, with the world's most sophisticated colour matching system. All this in an easy to use system that spray painters, kitchen makers and shopfitters have loved since 1985.

And if you're a designer or specifier, you'll love the range of colours – more than 40,000 electronically recorded and growing.

When You Can't Get It On Fast Enough

If speed of production is important to you, you'll recognise the value of 850 Spraythane. While many products struggle to cure within days of spraying, 850 cures for packing overnight – and sooner when baked or cured in warmer temperatures. Faster turnaround times mean better scheduling of jobs and less waiting.

Normally the speed of 850 would diminish the gloss level, but with specialised additives and the latest polyurethane technologies, it displays excellent gloss and definition of image at a speed that is simply breathtaking.

Designed for All Temperatures

Think a fast-curing polyurethane will boil in tropical summers? Think again. 850 Spraythane was initially designed for use in a Queensland summer under some of the most extreme conditions on the planet.

Combine these design requirements with three Part B hardeners that further extend working temperatures, and you have a product that is effective from just under 10°C to more than 35°C and high humidity.

Goes on Easy Without Thinning

Thousands of applicators can't be wrong. With a simple 3:1 mixing ratio and no required thinning, 850 Spraythane has benefited by countless hours of laboratory testing to increase usability and application. If you want to waste less time mixing and applying product, 850 Spraythane is the choice of professionals.

Gloss. Satin. Matt. Same Features. Same Hardeners.

Three gloss levels and a range of textured finishes (called 853 Vinyltex), opens new possibilities and choices for designers and specifiers.

The classic Gloss finish (95-100% gloss level) exhibits excellent gloss and definition of image at blinding speed while the Satin (55-65%) and Matt finishes (25-35%) offer the same exceptional features and speed with the allure of a flatter surface.

Learn more about 850 Spraythane and all our other products at www.evic.com.au



evic paint & colour technology

IMAGINE > CREATE

© 2003

20 Lancaster Street, Ingleburn 2565 Australia

Phone +61 2 9829 2288 E-mail: info@evic.com.au

www.evic.com.au